


SINTEK

VALVULA SOLENOIDE DE ALTA PRESION BIDIRECCIONAL NORMALMENTE CERRADA o NORMALMENTE ABIERTA

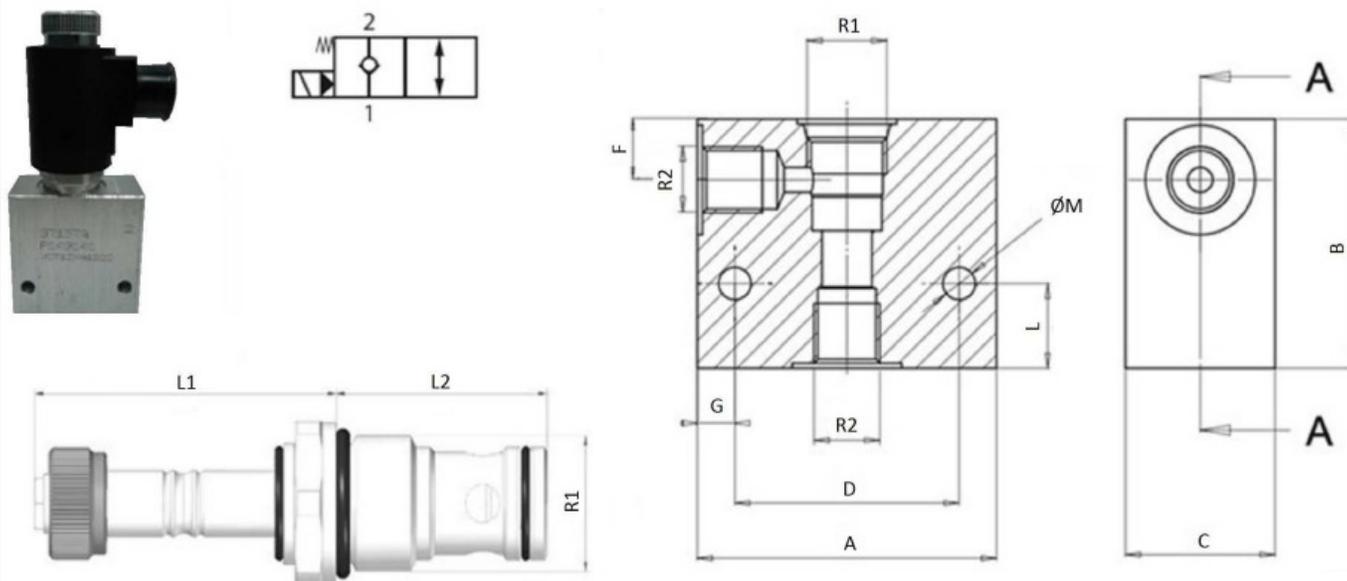

Referencia	R1	R2	Voltage (V)	Max. flow (l/min)	L1	L2	ØM	A	B	C	D	F	G	L
PDIA01038-S	3/4"-16U N F-2A	3/8" BSP	12DC	40,0	59,5	27,5	6,5	60,0	50,0	30,0	45,0	14,0	7,5	15,0
PDIA01039-S	3/4"-16U N F-2A	3/8" BSP	24DC	40,0	59,5	27,5	6,5	60,0	50,0	30,0	45,0	14,0	7,5	15,0
PDIA01040-S	3/4"-16U N F-2A	3/8" BSP	220VAC	40,0	59,5	27,5	6,5	60,0	50,0	30,0	45,0	14,0	7,5	15,0
PDIA01041-S	7/8"-14U N F-2A	1/2" BSP	12DC	60,0	77,0	31,2	6,5	60,0	50,0	30,0	45,0	17,5	7,5	15,0
PDIA01042-S	7/8"-14U N F-2A	1/2" BSP	24DC	60,0	77,0	31,2	6,5	60,0	50,0	30,0	45,0	17,5	7,5	15,0
PDIA01043-S	7/8"-14U N F-2A	1/2" BSP	220VAC	60,0	77,0	31,2	6,5	60,0	50,0	30,0	45,0	17,5	7,5	15,0
PDIA01044-S	1"1/16-16U N F-2A	3/4" BSP	12DC	120,0	64,0	46,0	6,5	70,0	70,0	50,0	54,0	26,0	8,0	15,0
PDIA01045-S	1"1/16-16U N F-2A	3/4" BSP	24DC	120,0	64,0	46,0	65,0	70,0	70,0	50,0	54,0	26,0	8,0	15,0
PDIA01046-S	1"1/16-16U N F-2A	3/4" BSP	220VAC	120,0	64,0	46,0	6,5	70,0	70,0	50,0	54,0	26,0	8,0	15,0

Altura total ensamblada 3/8: 109 mm, 1/2: 132,4 mm y 3/4: 138 mm

Cuerpo	Aluminio
máxima presión	250 bar
Voltajes disponibles	12VDC, 24VDC, 220VAC
Fluidos compatibles	Agua (Max: 60°C), Aire y Aceite (Max: 100°C);
Grado de protección	Conector DIN 43650 IP65

VALVULAS PROPORCIONALES ON / OFF